


BABY LOCK SEWING ACCESSORIES

Cording Foot

(BLQ2-CF)

Instructions


Attaching decorative cords and threads is a snap. This foot eliminates tangling to ensure that cords lie flat and perfectly parallel to each other. The Cording Foot controls threads so both hands can guide the fabric. Use this foot to create decorative stitching over cording on single and double layers of fabric.

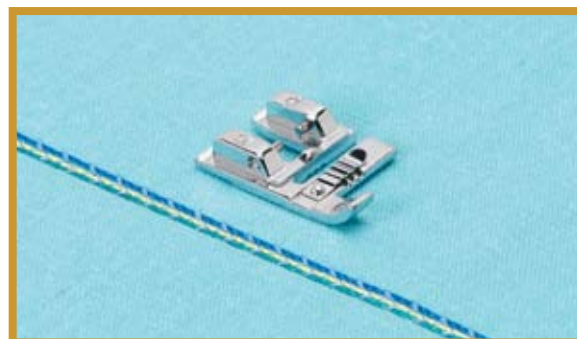

INSTRUCTIONS:


Removing the presser foot

Raise the presser foot (a).



Attaching the presser foot

Lower the presser foot holder (b) until the notch (c) is directly above the pin (d). Lower the presser foot holder (b) and the presser foot (e) will engage automatically.



The Precision Dual-Feed Quilting System (PDQ) feeds the fabric from the top and bottom simultaneously to ensure matching of the fabric layers, used for quilting layers of fabric and batting, and when matching checked, striped or plaid fabrics.

To Activate and Deactivate the Precision Dual-Feed Quilting System (PDQ)




To activate the PDQ system, raise the presser foot. Lower the PDQ mechanism slowly and swing the PDQ mechanism forward under the back of the presser foot until it is engaged and stays in the system. To deactivate the PDQ system, raise the presser foot, pull down on the mechanism and swing it to the rear then raise the PDQ up.




FOR THE LOVE OF SEWING

1. Remove the presser foot and attach the Cording Foot and engage PDQ.
2. Select stitch #6, 07 or #13.
3. Place the fabric under the foot.

Single cording

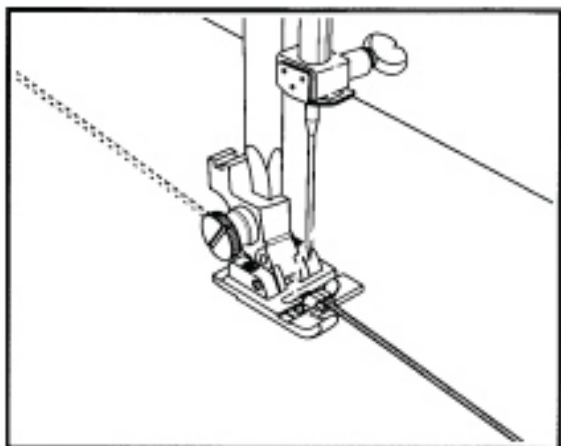

1. Mark the design on the fabric. Insert the cord in the center groove of the cording foot from the right side opening. Pull the cord about 2" behind the foot.
2. The grooves under the foot will hold the length of the cord in place while the stitches are being formed over the cord.
3. Select the stitch and adjust the stitch width so that the stitches are just covering the cord. Lower the foot and sew slowly, guiding the cord over the design.

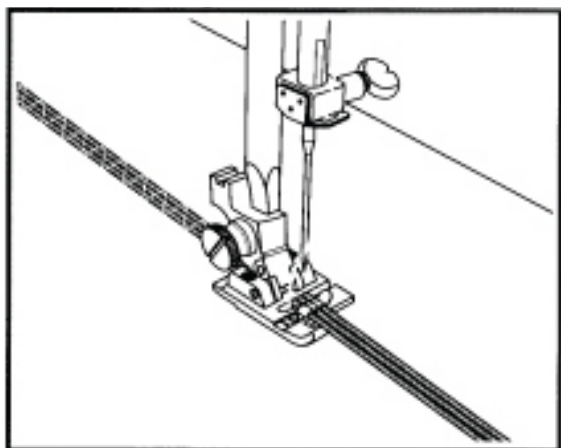

Triple cording

1. Push the sewing thread to the left and insert three cords into the grooves of the foot and pull about 2 inches of the cords behind the foot.
2. Select the desired pattern and adjust the stitch width so that the stitches are just covering the cords. Lower the foot and sew slowly guiding the cords.



FOR THE LOVE OF SEWING

800-422-2952

www.babylock.com